





Hinweis: Das Schloss benötigt zum Programmieren Energie. Batterie einlegen und Programmiergerät anschließen.

- 1-3. Öffnen Sie das Batteriefach
4. Schließen Sie das Programmiergerät an das Schloss an.
5. Öffnen Sie das Fenster „Schloss neu“.
6. Vergeben Sie dem Schloss einen Namen.
7. Wählen Sie die Schlossart „Beschlag“ aus.

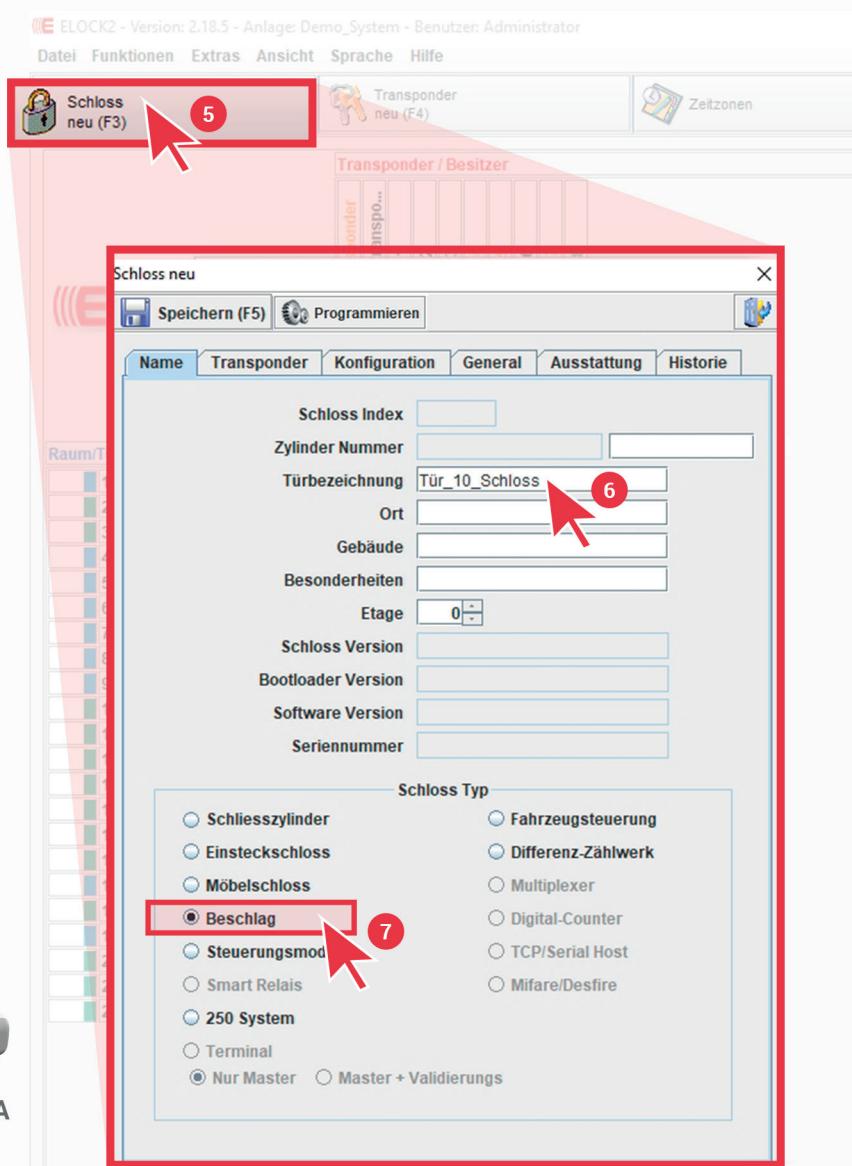

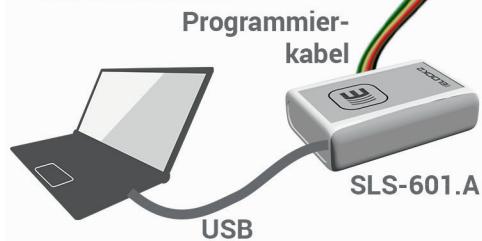

Hinweis: Das Schloss benötigt zum Programmieren Energie. Batterie einlegen und Programmiergerät anschließen.

8. Öffnen Sie das Register „Konfiguration“
9. Aktivieren Sie das Feld „Türwächter“
10. Öffnen Sie das Register „General“
11. Aktivieren Sie das Feld „Bluetooth“
- 12.+13. Jetzt können Sie speichern und programmieren

The screenshot shows the EP4S configuration software interface. It features three main tabs: Konfiguration (highlighted with a red box and red arrow 8), General (highlighted with a red box and red arrow 10), and Ausstattung (highlighted with a red box and red arrow 12). The Konfiguration tab contains fields for Schloss (Schloss neu), Transponder, and various configuration parameters. The General tab contains fields for Feiertage, Zeitmanagement, and Bluetooth. The Ausstattung tab contains fields for Ausstattung and Historie. Red numbered arrows (8, 9, 10, 11, 12, 13) point to specific checkboxes and buttons on the tabs.