



ELOCK2

External power input

Third-party system



INNOVATIVE ACCESS SOLUTIONS FROM
THE FIRST PLACE WINNER

MADE IN GERMANY




ELOCK2
M-Serie


20mm
Door closed =
automatic
full locking

**Patented automatic lock
with panic function**

**Simple interface
for external systems**

CE
DIN 18250
Ü
DO 20.34

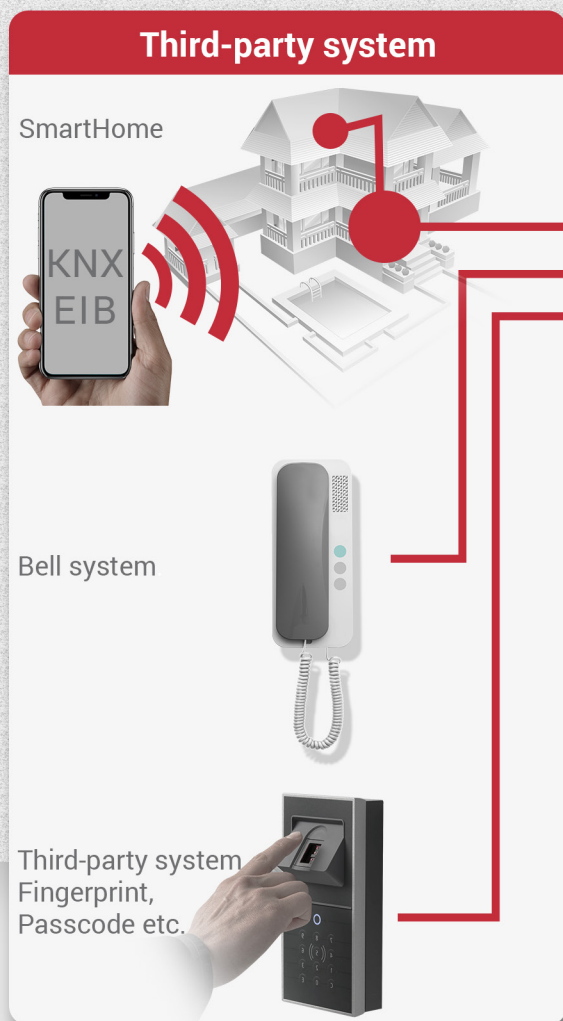

12V DC  and potential free contact



Interface freedom with ELOCK2

The lock is opened via the potential-free contact of the existing system. With this function, it is possible to combine the lock with the existing access control, intercom system, electronic combination locks, biometric systems and time controls.

In principle, the ELOCK2 automatic lock can always be opened from the inside (panic function). Thus, the external connection offers new possibilities for the integration of escape, fire and smoke protection doors into the building management system.

The access terminal from ELOCK2

The Z83AP offers a wide range of possible applications intelligent access control systems. An optimized housing design allows subsequent, simple, fast and secure installation on any intercom system, letterbox system and in elevators.

The front of the device is dust- and splash-proof according to protected according to IP65. The integrated antenna excellent reading performance.

Your added value

- Definition of user profiles for user groups, access areas and time zones
- Management of invalid and lost transponders
- Management and issuance of guest/visitor contractor transponders
- Detailed reports on access activities
- Multi-user and multi-client capability, management by multiple users
- Alarm triggering function

simple interface
for external systems

Automatic lock with
patented self-locking
and panic function

Connection adapter
at the lock



+ - S

Door closed =
automatic full locking

20mm

EN179
Direction of escape
always free
also in locked position

Example model: tubular frame lock R3
(can be combined with locking cylinder)

Features of the lock:

- Housing made of high quality stainless steel
- Burglar resistant
- Standard dimensions
- The locks are approved for use on fire doors
- Self-locking when door is closed
- Split lock follower 9 mm
- Mechanical opening possible via profile cylinder


Fire and smoke protection:

The automatic lock with external power supply is generally approved for use on fire and smoke protection doors. A corresponding test certificate/monitoring contract is available. This allows the installation of the automatic lock in existing fire doors without loss of approval.



Interested?
Request online without obligation!
Scan QR code or click link

<https://elock2.com/index.php?id=1012>

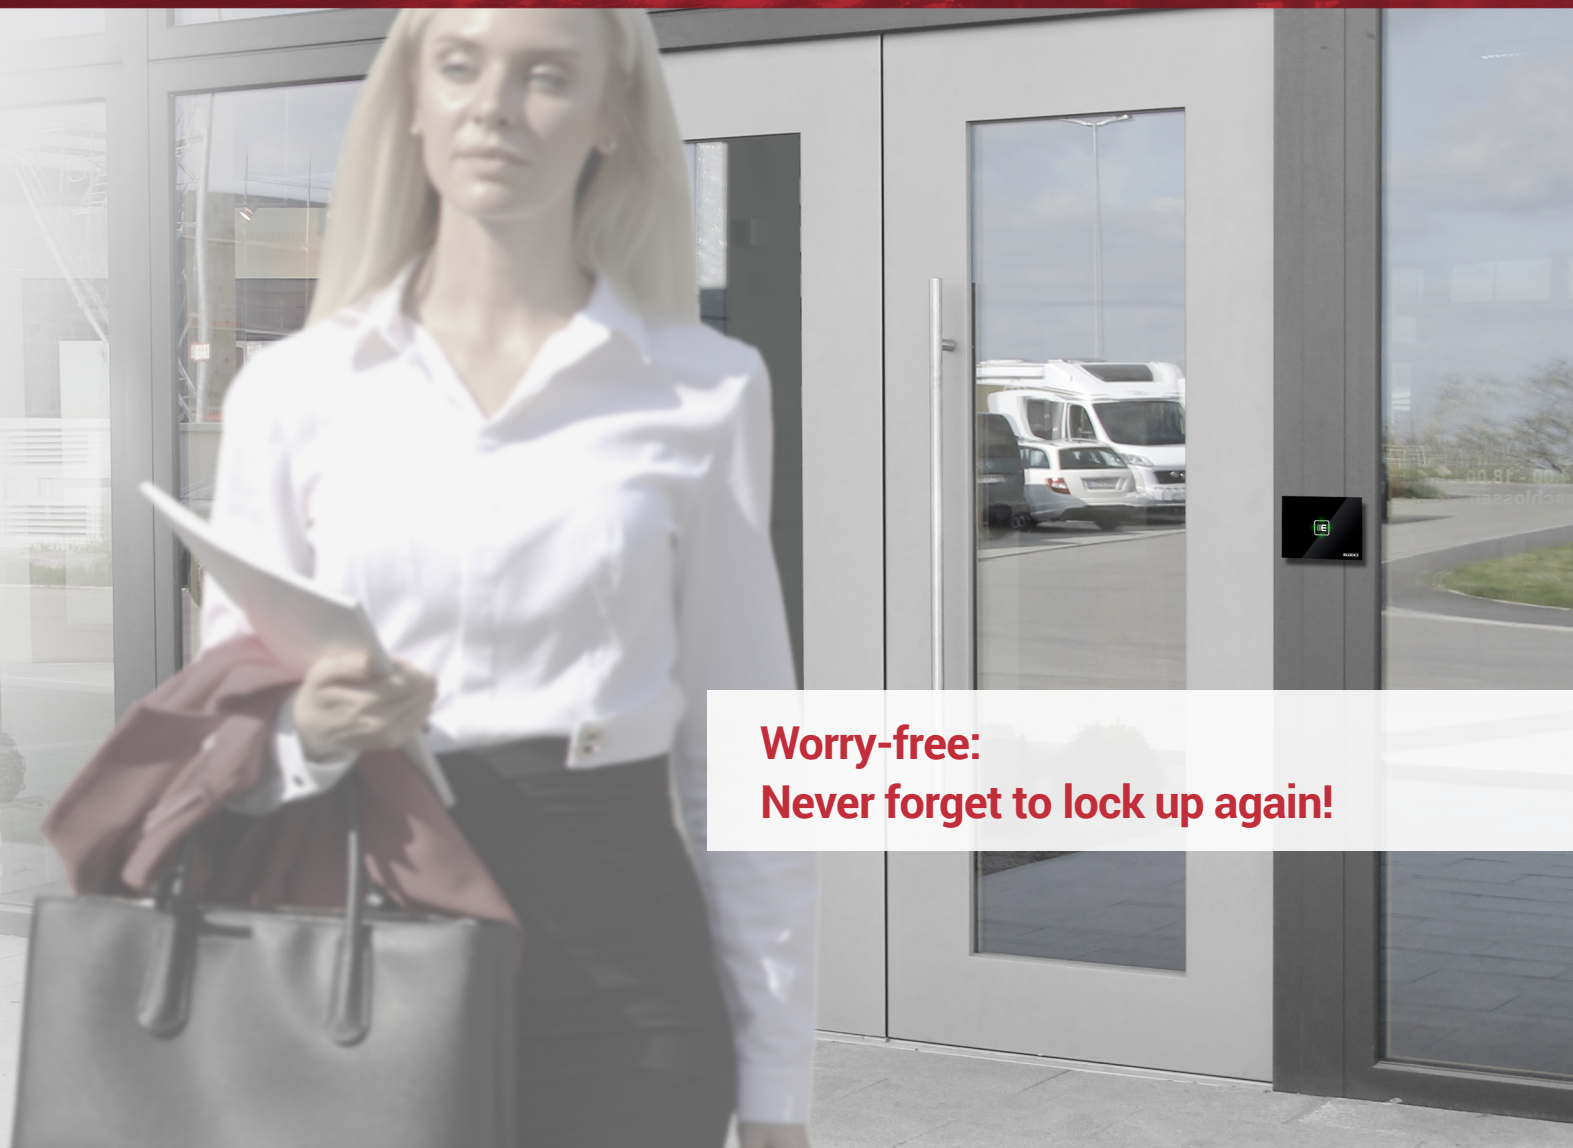


**Worry-free:
Never forget to lock up again!**

The automatic self-locking system

The patented ELOCK2 automatic locks lock automatically as soon as you pull the door shut. A simple interface allows you to control or release the lock via third-party systems.

Compatible with
third-party
systems

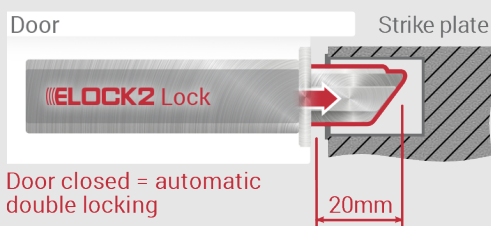


NEW
insurance
compliant & safe



OLD

Automatic locks with external power supply:




V3
for full leaf doors

Scan QR-Code or click link



<https://elock2.com/index.php?id=991>




R3
for tubular frame doors

Scan QR-Code or click link



<https://elock2.com/index.php?id=1029>




M3
Middle latch lock

Scan QR-Code or click link



<https://elock2.com/index.php?id=992>



ST3
for garden gates

Scan QR-Code or click link



<https://elock2.com/index.php?id=998>



B3
Fitting lock

Scan QR-Code or click link



<https://elock2.com/index.php?id=996>



Access terminal
Z83AP / Z85AP

Scan QR-Code or click link



<https://elock2.com/index.php?id=971>

Your personal consultant:

Innovative access solutions from the first-place winner



<https://elock2.com/index.php?id=368>

Produktkatalog als PDF



<https://elock2.com/index.php?id=581>

Neuigkeiten



<https://elock2.com/index.php?id=861>

Infomaterial Produkte



<https://elock2.com/index.php?id=860>

Infomaterial Systeme und Funktionen



<https://elock2.com/index.php?id=622>


Ausschreibungstexte



<https://elock2.com/index.php?id=621>

Zertifikate / Prüfdokumente

Discover the whole ELOCK2 system now



Mechanical / digital automatic locks with panic function



Digital locking cylinders (also with panic function)



Intelligent escape route protection



Digital padlocks and tube safes



Digital furniture locks



Access terminal e.g. for doors and barriers

ELOCK2 access system with 360° perfection

Patented systems and highly differentiated access management with ELOCK2 software with interfaces to alarm and database systems (according to open standards).

Wireless installation in all standard doors (including glass and tubular frame doors) significantly reduces investment costs in new construction and retrofitting compared to wired systems.

Excellent scalability in the introduction and expansion of locking systems, even for unnetworked properties, thanks to virtual networking. Systems are suitable for fire doors and escape doors.

Excellent technical support for hardware and software from qualified service partners and directly from the manufacturer ELOCK2 - the medium-sized family business with short routes.

ELOCK2
MADE IN GERMANY

Gutenbergstr.10-12
D-73779 Deizisau
vertrieb@elock2.de

Tel: +49(0)711 901213 - 86
Fax: +49(0)711 901213 - 99
www.elock2.com

Quality certified by
DIN EN ISO 9001